


PNL Series Panel Readers ISO Compatible

Model PNL2530-3/PNL4060-3/PNL60120-3



General Description

The Allflex Series Panel Readers are flat panel antennas and integral passive transponder reading devices that are compatible with the technical specifications of ISO Standards 11784 and 11785, including both HDX and FDX-B technologies. The Panel Readers provide the basic RF/ID reader functions of reading and transmitting via RS232/RS422 serial data the identification code contained within passive transponder for real time and batch mode data logging. The Panel Reader provides two indicator lights designating "Exciter Active" (red) and "Good Read" (green). Power and serial data are connected to a Panel Reader through a 2 meter long cable. The Panel Reader is provided with a Windows® based PC utility Configurator®, which provides users an easy means of customizing the Panel Reader's serial data format and operating mode. The Panel Readers are intended for stationary mounting in applications where electronic, ear tagged livestock transverse past the panel.

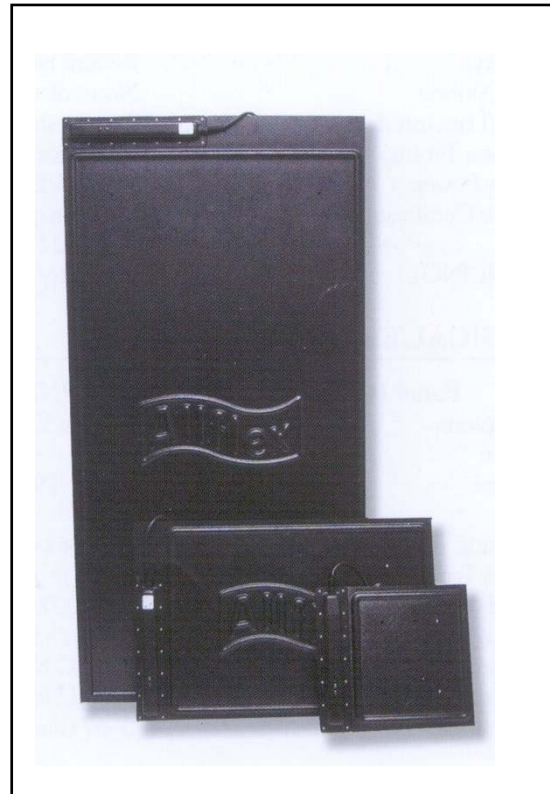

Construction

The Allflex Series Panel Readers are assembled in laminated plastic panel enclosures that are designed to withstand the hazards and abuse in livestock operations. The Panel Reader's antenna coil is sealed within the laminated plastic, while the reader's electronic assembly is enclosed in a separated compartment featuring a gasket-sealed cover. The Panel Reader is hermetically sealed to IP67 specifications for being dust tight and immersable in water and is available constructed from either economical PVC plastic or high-durability UHMW polyethylene. The data/power cable exits the reader compartment through a watertight strain relief.

Performance Capabilities

The Allflex Series Panel Reader provides various read range performances that are proportional to panel size and supply voltage, which can range between 6 and 12 VDC. Typical read range performances are listed within the Specifications section of this document.

Ordering Information

SKU	Description
PNL2530-3	23cm x 32cm Series Panel Reader
PNL4060-3	40cm x 60cm Series Panel Reader
PNL60120-3	60cm x 120cm Series Panel Reader

Accessories

PW406	Panel Reader Power Supply 6 Volts @ 3.0 Amps
PW407	Panel Reader Power Supply 6 Volts @ 6.0 Amps
PW408	Panel Reader Power Supply 12 Volts @ 3.3 Amps

Allflex USA, Inc.

P.O. Box 612266 * Dallas/Fort Worth Airport, TX 75261-2266
800-989-TAGS (8247) * Customer Toll Free FAX 877-456-3969

Allflex Canada

4135 Berard * St. Hyacinthe, Quebec J2S 8Z8
866-505-TAGS (8247) * FAX 450-261-8028

www.allflexusa.com

PNL Series Panel Readers ISO Compatible

Model PNL2530-3/PNL4060-3/PNL60120-3

SPECIFICATIONS

GENERAL

RFID Compatibility:	ISO 11784 & 11785 HDX and FDX-B
Form Factor:	Flat Laminated Plastic Enclosure
User Interface:	Red LED "Exciter Active" Visual Indicator Green LED "Good Read" Visual Indicator RS232/RS422 Serial Data Port
RS232 Serial Port:	1200 BPS to 57.6 KBPS (9600,N,8,1 default setting)
Serial Data ID Code Format	Decimal to Hexadecimal w/flexible formatting options
Memory:	Retains last ID Code read in non-volatile memory for retransmission
User Options:	Non-volatile mode control options selectable via RS232 serial port interface
Power/Data Interface:	3 meter straight cable (unterminated) / can be extended
Antenna Tuning:	Capacitor array located inside reader compartment
Battery Power:	6 to 12 VDC (External Battery or Mains Powered Linear Regulated Supply)
Agency Certifications: (PENDING)	Electromagnetic Compatibility – FCC Part 15 Class A / CISPR 22(EN55022) * ISPRa Certification

PHYSICAL/ENVIRONMENTAL

Panel Reader Model:	PNL-2530-3	PNL-4060-3	PNL-60120-3
Dimensions:	25cm x 30cm x 30mm 30mm 9.84" x 11.81" x 1.01" 1.01"	40cm x 60cm x 30mm 15.75" x 23.62" x 1.01"	60cm x 120cm x 23.62" x 47.24" x
Weight:	~ 2kg (4.41 lbs)	~ 6 kg (13.23 lbs)	~ 18 kg (39.69 lbs)
Material:	ABS UL94 HB Plastic		
Color:	Black ABS		
Operating Temperature	-10°C to + 55°C (IEC68.2.1/.2)		
Storage Temperature	-40°C to + 85°C (IEC68.2.1/.2)		
Humidity:	0 to 100% (IEC.2.56)		
Altitude:	-100 to +3,000 meters		
Mechanical Shock:	Per IEC 68-2-27 (15g/11ms saw tooth) & 1 meter free-fall drop onto concrete)		
Vibration:	Per IEC 68-2-6 (10-55 Hz sinusoidal/0.75mm displ./1 oct/min./10 cycles)		
Hermeticity:	IP-67 (dust-tight/immersible) per IEC 529		

RELIABILITY

MTBF:	50,000 hours
MTTR:	0.5 hours (field replaceable electronics module)
Expected Life:	5 years, minimum

PERFORMANCE

Panel Reader Model:	PNL-2530-3	PNL-4060-3	PNL-60120-3
Read Distance: (@ 6 VDC battery) (add ~ 20% for 12VDC)	60cm (23.62") (HDX/HP) (HDX/HP) 45cm (17.72") (FDX-B)	80cm(31.50") (HDX/HP) 55cm (21.65") (FDX-B)	100cm (39.37") 70cm (27.56") (FDX-B)
Reading Orientation:	0° to 45° with less than 10% range decrease		
Read Zone:	80% of read distance across entire panel surface on either side		
Interrogation Rate:	~ 9 times/second		
Read Error Rate:	Less than 1 in 10 ⁶		
Exciter Signal Radiated Field Strength: @ 10 meters w/6VDC power input	94 dBuV/m	103 dBuV/m	112 dBuV/m